




EQUIPMENT TRAILERS

www.bigtextrailers.com

10ET / 12ET

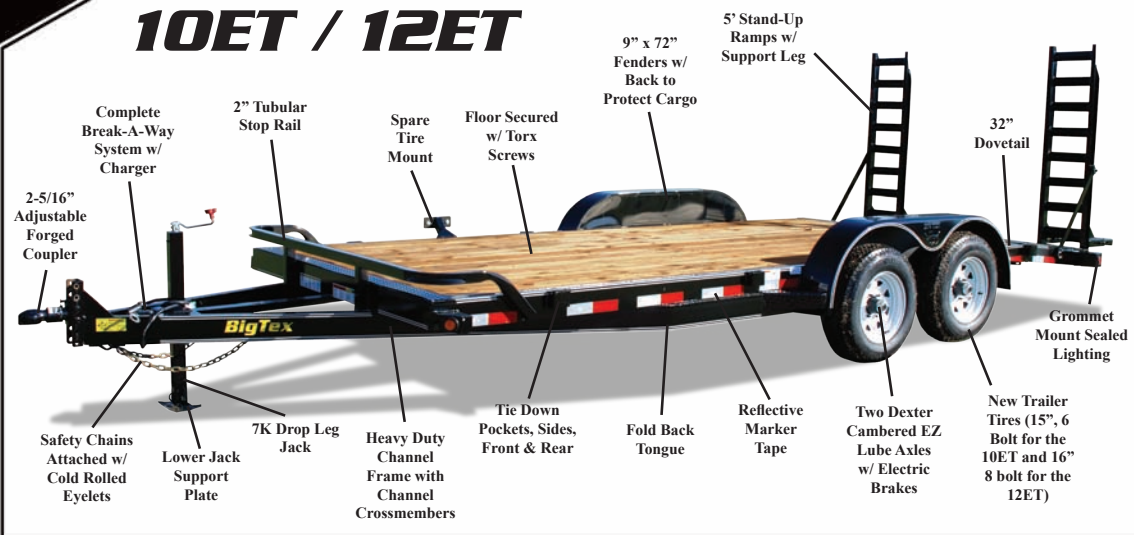

- 10ET and 12ET come in 83" width and in lengths of 16', 18', and 20'
- 10ET Approximate Carrying Capacity ranges from 7,500# - 7,690# depending on length
- 12ET Approximate Carrying Capacity ranges from 9,300# - 9,420# depending on length

Length options and flat deck provide versatility to haul light to medium duty equipment and small tractors.

10PI / 12PI



- 10PI comes in 83" width and standard lengths of 14', 16', 18' and 20'. 12PI comes in 83" width and in lengths of 16', 18' and 20'
- 10PI Approximate Carrying Capacity ranges from 7,400# - 8,000# depending on length
- 12PI Approximate Carrying Capacity ranges from 9,300# - 9,600# depending on length
- 2-5/16" Forged Coupler
- 10PI has 15" Tires (6 bolt), 12PI has 16" Tires (8 bolt)
- 2-7/8" Pipe Top Rail

The 10PI & 12PI are perfect for hauling light to medium duty equipment and small tractors. Slide in ramps allow for easy loading and unloading of equipment.

10CC / 14CC



- 83" width and standard lengths of 16' and 18'
- 10CC Approximate Carrying Capacity of 7,500#
- 14CC Approximate Carrying Capacity of 11,250# - 11,400# depending on length
- 2-5/16" Forged Coupler
- 10CC has 15" Tires (6 bolt). 14CC has 16" Radial Tires (8 bolt)
- 2" Tubular Stop Rail

Econo style trailer with slide in ramps and rear stabilizer stands make this trailer the perfect car carrier / entry level equipment hauler.

10EQ / 12EQ



- 83" width (79" usable width) and standard lengths of 14', 16' and 18'
- 10EQ Approximate Carrying Capacity ranges from 7,300# - 7,500# depending on length
- 12EQ Approximate Carrying Capacity ranges from 9,100# - 9,400# depending on length
- 2-5/16" Adjustable Forged Coupler
- 10EQ has 15" Tires (6 bolt), 12EQ has 16" Radial Tires (8 bolt)

Trailer comes with 5' stand-up ramps with expanded metal in bottom of tongue which maximizes storage & hauling use. Perfect for light to mid range equipment and more condensed weight loads, such as a skid steer.

100A / 120A



- 102" width and in standard lengths of 16', 18', and 20'
- 100A Approximate Carrying Capacity ranges from 6,700# - 6,900# depending on length
- 120A Approximate Carrying Capacity ranges from 8,600# - 8,900# depending on length
- 2-5/16" Adjustable Forged Coupler
- 100A has 15" Tires (6 bolt), 120A has 16" Tires (8 bolt)

The extra-wide flat bed is perfect for hauling hay or for most pallet applications. Rub rail with stake pockets provide for easy tie down and safe transport of load.

10FT / 12FT



- 80" width and in standard lengths of 16', 18' and 20'
- 10FT Approximate Carrying Capacity ranges from 6,800# - 7,100# depending on length
- 12FT Approximate Carrying Capacity ranges from 8,800# - 9,100# depending on length
- 2-5/16" Adjustable Forged Coupler
- 10FT has 15" Tires (6 bolt), 12FT has 16" Tires (8 bolt)

This full tilt trailer offers a low load range for hard to load cars and mid range industrial equipment. Perfect for hauling low profile industrial mowers and forklifts.

10TL / 12TL



- 80" width x 20'
- 6,900# Approximate Carrying Capacity for the 10TL
- 8,700# Approximate Carrying Capacity for the 12TL
- 2-5/16" Adjustable Forged Coupler
- 10TL has 15" Tires (6 bolt), 12TL has 16" Tires (8 bolt)

Trailer offers a 4' stationary deck for more versatile hauling and tongue weighted towing. Low load range is perfect for hard to load items such as cars, low profile industrial equipment and small bull dozers.

14PI



- 83" width and in standard lengths of 16', 18' and 20'
- Approximate Carrying Capacity ranges from 11,000# - 11,400# depending on length
- 2-5/16" 14K Cast Coupler
- 16" Radial Tires (8 bolt)

3" square tubing top rail helps to secure your load of medium to heavy duty equipment and mid size tractors. Channel slide in ramps allow for easy loading and unloading of equipment.

14ET



- 83" width and in standard lengths of 16', 18' and 20'
- Approximate Carrying Capacity ranges from 11,200# - 11,400# depending on length
- 2-5/16" Adjustable Cast Coupler
- 16" Radial Tires (8 bolt)

Heavy duty frame allows for mid to heavy duty equipment hauling. 32" dovetail with 5' stand up ramps allows for easy loading and unloading of equipment.

12GP



- 83" width and in standard lengths of 18' and 20'
- Approximate Carrying Capacity ranges from 8,900# - 9,000# depending on length
- Gooseneck with 2-5/16" Adjustable Coupler
- 16" Tires (8 bolt)

Pipe top gooseneck with 2-7/8" pipe top rail to help secure your load of small to medium duty equipment and small tractors. Channel slide in ramps allow for easy loading and unloading of equipment.

14GP



- 83" width and in standard lengths of 20' and 24'
- Approximate Carrying Capacity ranges from 10,400# - 10,800# depending on length
- Gooseneck with 2-5/16" Adjustable Coupler
- 16" Radial Tires (8 bolt)

Heavy duty pipe top gooseneck has 3" square tubing on top rail to help secure your load of medium to heavy duty equipment and mid size tractors. Channel slide in ramps allow for easy loading and unloading of equipment.

12PT



- 68" width and standard lengths of 32' and 40'
- Approximate Carrying Capacity ranges from 7,700# - 8,300# depending on length
- 2-5/16" Forged Coupler
- 16" Radial Tires (8 bolt)

Tandem axle pipe transport is perfect for oil field use and hauling extremely long items such as pipe. Comes equipped with three- 4" winches with straps and winch bar to help secure loads.