




HEAVY EQUIPMENT

www.bigtextrailers.com

4XPH

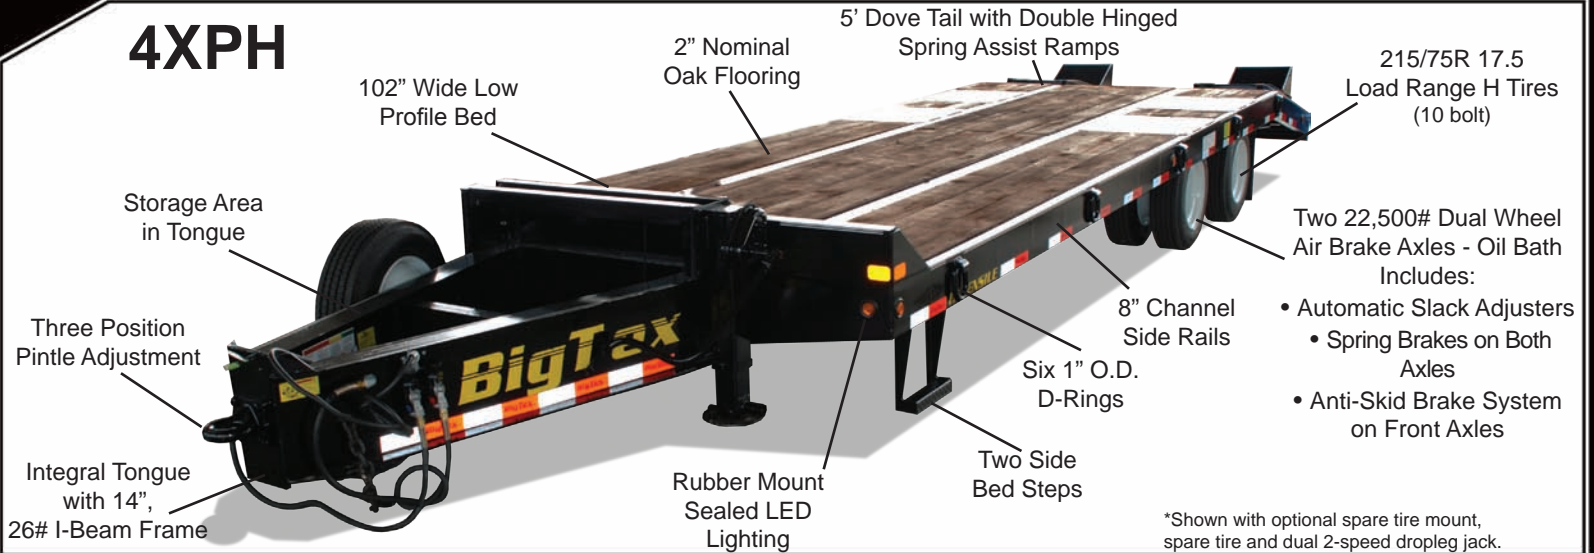

60TP



- Single Axle Pan Tilt Transport Trailer available in 78" width and 12' length
- 4,200# Approximate Carrying Capacity • Adjustable Forged 2-5/16" Coupler
 - 4" x 2" Square Tubing Tongue • 2K Swivel Mount Jack
 - One Piece 3/16" Steel Pan Tilt Bed with 11 Degree Tilt Angle
 - 6,000# EZ Lube Torsion Axle with Electric Brake
 - 16" Tires (8 bolt) • Texturized Floor for Increased Traction
 - Grommet Mount Sealed Lighting

10EP



- Tandem Axle Pan Equipment Transport Trailer available in 78" width and lengths of 14' and 16' • Approximate Carrying Capacity ranges from 7,400# to 7,550#, depending on length • Adjustable Forged 2-5/16" Coupler
 - 4" x 2" Square Tubing Tongue • 2K Swivel Mount Jack
- One Piece 3/16" Steel Formed Pan • Two 5,200# Cambered EZ Lube Axles with Electric Brakes • 15" Tires (6 bolt) • Texturized Floor for Increased Traction
 - Grommet Mount Sealed Lighting
 - 40" Heavy Duty Fold Up Ramps with Expanded Metal

20ED



- Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5' • Approximate Carrying Capacity ranges from 18,800# to 20,000#, depending on length • Integral Tongue with 12", 19# I-Beam Frame
 - 60K, 3" ID Three Position Pintle Eye • 12K Top Wind Drop Leg Jack
- Low Profile Bed with Oak Flooring • Two 10,000# Heavy Duty Dual Wheel Axles - Oil Bath Electric Brakes with Complete Break-A-Way System
 - 16" Tires (8 bolt) • Rubber Mount Sealed LED Lighting
 - 5' Dove Tail with Double Hinged Spring Assist Ramps

20AD



- Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5' • Approximate Carrying Capacity ranges from 18,800# to 20,000#, depending on length • Integral Tongue with 12", 19# I-Beam Frame
 - 60K, 3" ID Three Position Pintle Eye • 12K Top Wind Drop Leg Jack • Low Profile Bed with Oak Flooring • Two 10,000# Heavy Duty Dual Wheel Axles - Air Brakes with Automatic Slack Adjusters, Spring Brakes and ABS • 16" Tires (8 bolt)
 - Rubber Mount Sealed LED Lighting • 5' Dove Tail with Double Hinged Spring Assist Ramps

24ED



- **Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • Approximate Carrying Capacity ranges from 22,800# to 24,000#, depending on length • Integral Tongue with 12", 19# I-Beam Frame
 - 60K, 3" ID Three Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Two 12,000# Heavy Duty Dual Wheel Axles
 - Oil Bath Electric Brakes with Complete Break-A-Way System
 - 16" Tires, LR-G (8 bolt) • Rubber Mount Sealed LED Lighting
 - 5' Dove Tail with Double Hinged Spring Assist Ramps

24AD



- **Pintle Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • Approximate Carrying Capacity ranges from 22,800# to 24,000#, depending on length • Integral Tongue with 12", 19# I-Beam Frame
 - 60K, 3" ID 3 Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Two 12,000# Heavy Duty Dual Wheel Axles
 - Oil Bath Air Brakes with Automatic Slack Adjusters, Spring Brakes and ABS
 - 16" Tires, LR-G (8 bolt) • Rubber Mount Sealed LED Lighting
 - 5' Dove Tail with Double Hinged Spring Assist Ramps

4XPH



*Shown with optional spare tire mount, spare tire and dual 2-speed dropleg jack.

- **Pintle Heavy Equipment Transport Trailer available in 102" width and in lengths of 20' + 5' and 24' + 5'** • Approximate Carrying Capacity ranges from 37,800# to 39,000#, depending on length • Integral Tongue with 14", 26# I-Beam Frame
 - 60K, 3" ID Three Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Two 22,500# Dual Wheel Axles with Oil Bath - Air Brakes with Automatic Slack Adjusters and Spring Brakes on Both Axles
 - 17.5" Tires (10 bolt budd) • Rubber Mount Sealed LED Lighting
 - 5' Dove Tail with Double Hinged Spring Assist Ramps

5XGL



*Shown with optional deck on neck and plate over tires.

- **Lowboy Heavy Equipment Transport Trailer available in 102" width and 20' length** • 48,000# Approximate Carrying Capacity
 - SAE 2" Kingpin Coupler • 16", 31# I-Beam Neck with Storage Area
 - 16", 31# I-Beam Frame with 12" Channel Side Rails
- **Adjustable Four Position Jack with Landing Legs** • Low Profile Bed with Oak Flooring • Two 22,500# Dual Wheel Axles with Heavy Duty Oil Bath - Air Brakes with Automatic Slack Adjusters and Spring Brakes on Both Axles
 - Anti-Skid Brake System on Front Axle • 17.5" Tires (10 bolt budd)
 - Rubber Mount Sealed LED Lighting
 - 3' Dove Tail with Double Hinged Spring Assist Ramps

5XPH



*Shown with optional spare tire mount, spare tire and dual 2-speed dropleg jack.

- **Pintle Heavy Equipment Transport Trailer available in 102" width and in lengths of 24' and 28'** • Approximate Carrying Capacity ranges from 47,100# to 47,600#, depending on length • Integral Tongue with 14", 26# I-Beam Frame
 - 60K, 3" ID 3 Position Pintle Eye • 12K Top Wind Drop Leg Jack
- **Low Profile Bed with Oak Flooring** • Three 22,500# Dual Wheel Axles with Heavy Duty Oil Bath - Air Brakes with Automatic Slack Adjusters and Spring Brakes on Three Axles
 - 17.5" Tires (10 bolt budd) • Rubber Mount Sealed LED Lighting
 - 5' Dove Tail with Double Hinged Spring Assist Ramps

Trailers may be shown with options that are not standard. Carrying Capacities may vary with options. For a complete list of all trailer specifications and features, log on to www.bigtexttrailers.com.